

Introducing

TSE-REX Rapid
EXchange
push rods™



To Go Where No Spring Brake Has Gone Before

TSE-REX™


Rapid EXchange Push Rods

It's time to take a big bite
out of inventory costs

- Reduce inventory costs with patent pending rapid exchange push rods
- Reduce installation labor costs
- Reduce installation errors caused by manually cutting rods



New for 2018
TSE-REX UltraLife Plus

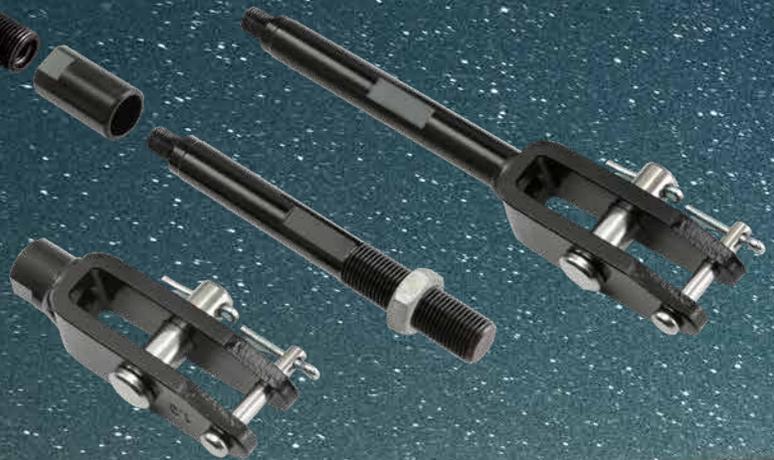

Innovation in Motion



256-736-6275

www.TSEbrakes.com






TSE-REX Omni
assembly shown with
optional clevis push rod
3030TVR2: 3030 2.5" Stroke
3030TVR3: 3030 3" Stroke




TSE-REX UltraLife Plus
assembly shown with
optional clevis push rod
3030TVR2ULP: 3030 2.5" Stroke
3030TVR3ULP: 3030 3" Stroke

TSE-REX Push Rod Kits



Single Kit Models	Box Color Code	Description	Typical Applications	Works with the following Auto-Slack brands & models*
Push rod kits - Threaded includes jam nut installed				
K575	Gold	5.75" B dimension threaded Rod	Standard 5" trailer axle	All
K631	Silver	6.31" B dimension threaded Rod	SAF axle	
K706	Purple	7.06" B dimension threaded Rod	Meritor large diameter axle	
K975	Green	9.75" B dimension threaded Rod	Intraax/Vantraax	
K150	None	15.0" B dimension threaded Rod	Universal fully threaded	



Single Kit Models	Box Color Code	Description	Typical Applications	Works with the following Auto-Slack brands & models*
Push rod kits - Fixed Clevis includes stainless steel pins and cotters installed				
K225-130	None	2.25" A dimension Fixed Clevis with 1.3" pin spacing	Truck welded clevis	1, 3, 4, 6, 8
K680-102	Orange	6.80" A dimension Fixed Clevis with 1.02 pin spacing	Standard 5" Axle Gunite Slack	1, 2
K680-130	Yellow	6.80" A dimension Fixed Clevis with 1.3" pin spacing	Standard 5" Axle	1, 3, 4, 6, 8
K680-138	White	6.80" A dimension Fixed Clevis with 1.38" pin spacing	Standard 5" trailer axle Meritor, Stemco slack	1, 5, 7
K110-130	Brown	11.0" A dimension Fixed Clevis with 1.3" pin spacing	Intraax/Vantraax	1, 3, 4, 6, 8
K110-138	Blue	11.0" A dimension Fixed Clevis with 1.38" pin spacing	Intraax/Vantraax Meritor, Stemco slack	1, 5, 7

***Auto-Slack Notes:**

1. TSE/Webb/MEI/Haldex (0.5" pin)
2. Gunite 1000 series 1.02" pin spacing
3. Gunite 2000 series 1.3" pin spacing
4. Meritor 1.3" pin spacing (Truck)
5. Meritor 1.38" pin spacing (Trailer)
6. Stemco 1.3" pin spacing
7. Stemco 1.38" pin spacing
8. Bendix Versajust

OEM names are used for reference purposes only.



www.TSEbrakes.com
256-736-6275
TSE Brakes, Inc.
2310 Industrial Drive S.W.
Cullman, Alabama 35055

*The global leader in spring brake design,
innovation, technology and performance!*