




Simplify

Inventory.
Installation.

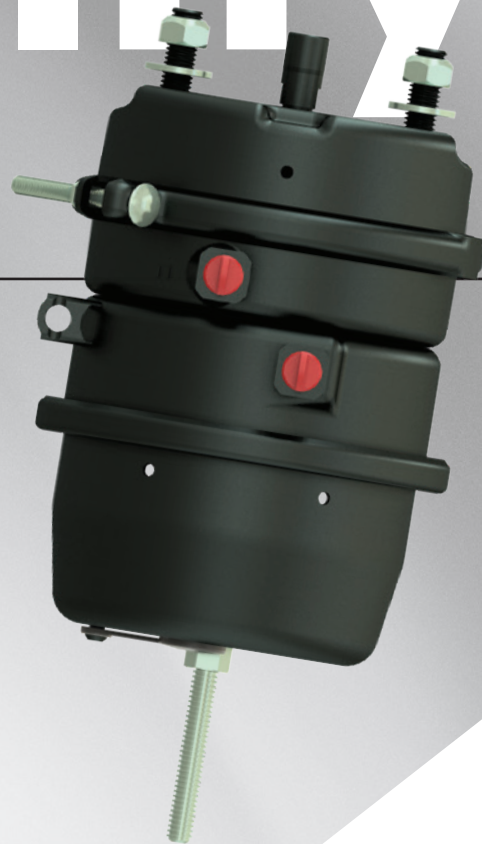

Rapid Exchange Rod brake chambers

STROKE OPTION

2.5"
3.0"

SIZE OPTION

3030TVR2
3030TVR3

KIT OPTION

THREADED ROD
FIXED CLEVIS

4 YEAR
WARRANTY





Simplify Inventory | Simplify Installation.

TSE REX combines the factory-sealed VCT chamber platform with interchangeable threaded rod and fixed-clevis kits. Two core chamber models support a broad range of approved axle and slack-adjuster applications, helping fleets, OEMs, intermodal service networks, and distributors reduce complete chamber inventory and standardize installation for truck and trailer applications.

Feature Highlights

- All-steel brake chamber
- Factory-sealed diaphragm
- 180-degree variable clocking
- Patented rapid exchange rod connection
- Color-coded kit identification



Find Broader Coverage With Fewer Chambers

- Two core stroke platforms pair with application-specific rod and clevis kits to serve a wide range of approved configurations.

Lower Inventory Complexity

- Reduces separate complete-chamber configurations across warehouses, production lines, shops, terminals, and service trucks.

Faster, More Consistent Installation

- Select the required kit without manually cutting the pushrod. Factory-sealed VCT clocking supports proper port orientation with fewer installation steps.

Single Kit Models	Box Color Code	Description	Typical Applications	Works with the following Auto-Slack brands & models*
Push Rod Kits – Threaded includes jam nut installed				
K575	Gold	5.75" B dimension threaded rod	Standard 5" trailer axle	All
K975	Green	9.75" B dimension threaded rod	Intraax / Vantraax	All
K150	None	15.0" B dimension threaded rod	Universal fully threaded	All
Push Rod Kits – Fixed Clevis includes stainless steel pins and cotters installed				
K225-130	None	2.25" A dimension / 1.3" pin	Truck welded clevis	1,3,4,6,8
K680-102	Orange	6.80" A dimension / 1.02" pin	Standard 5" Axle Gunitite	1,2
K680-130	Yellow	6.80" A dimension / 1.3" pin	Standard 5" Axle	1,3,4,6,8
K680-138	White	6.80" A dimension / 1.38" pin	Standard 5" trailer axle	1,5,7
K110-130	Brown	11.0" A dimension / 1.3" pin	Intraax / Vantraax	1,3,4,6,8
K110-138	Blue	11.0" A dimension / 1.38" pin	Intraax / Vantraax	1,5,7

* 1. TSE / Webb / MEI / Haldex (0.5" pin) | 2. Gunitite 1000 series (1.02" pin spacing) | 3. Gunitite 2000 series (1.3" pin spacing) | 4. Meritor 1.3" pin spacing (Truck) | 5. Meritor 1.38" pin spacing (Trailer) | 6. Stemco 1.3" pin spacing | 7. Stemco 1.38" pin spacing | 8. Bendix Versajust



2310 Industrial Drive S.W. Cullman, Alabama 35055 | 256 736-6275
©2026 TSE Brakes, Inc. tsebrakes.com



Marmon
Transportation
Products
A Berkshire Hathaway Company